




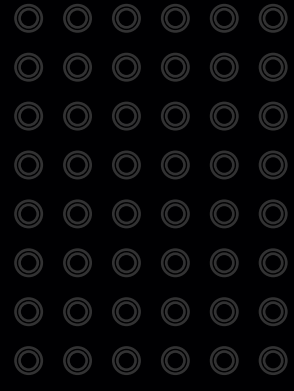

SEAL IS SOMETHING · QUALITY IS EVERYTHING


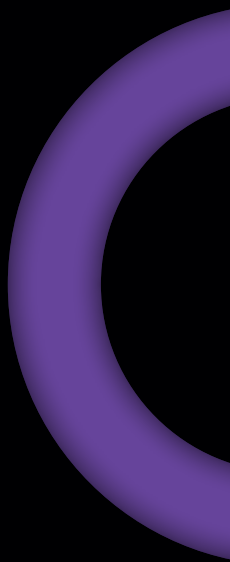


# UA7 SERIES PNEUMATIC



# UA7 Series

Rod Wiper Seal

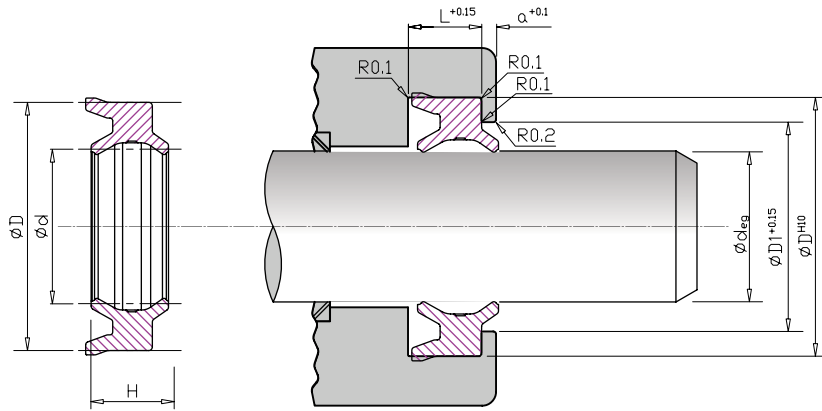

POLYCAPROLACTONE TPU 90 PHYSICAL PROPERTIES				
Working Pressure: $\leq 1.6$ Mpa			Hardness	90 Shore A DIN53505
Working Temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$				90 Shore A ASTM D2240
Surface Speed: $\leq 1.0$ m/s			Tensile Strength	45 Mpa DIN53504 6625 psi ASTM D-412
Compression Set	19%	DIN53517	Elongation	460 % DIN53504
24 hrs @ $70^{\circ}\text{C}$	19%	ASTM D-395		460 % ASTM D-412
Specific gravity	$1.15 \text{ g/cm}^3$	DIN53479	Tear Strength	156 N/mm DIN53515 850 pli ASTM D-624
	$1.15 \text{ g/cm}^3$	ASTM D-972	Standard Compound	KC9010AC
			Color	Brown ●

CODE	d (mm)	D (mm)	H (mm)	a	D1	L
UA70003	3	5.6	2.8	0.6	4.6	2.7
UA70004	4	7.0	2.8	0.8	5.6	2.7
UA70005	5	8.0	2.8	0.8	7.1	2.7
UA70006	6	9.0	2.8	1.0	8.1	2.7
UA70008	8	11.5	3.2	1.0	10.1	3.0
UA70010	10	14.0	3.7	1.0	12.1	3.4
UA70012	12	16.5	4.0	1.2	14.1	3.7
UA70014	14	18.5	4.0	1.2	16.1	3.7
UA70016	16	20.5	4.0	1.2	18.1	3.7
UA70018	18	22.5	4.0	1.2	20.1	3.7
UA70020	20	25.0	4.6	1.2	23.1	4.15
UA70022	22	27.0	4.6	1.2	23.9	4.15
UA70025	25	30.0	4.6	1.2	26.9	4.15
UA70030	30	35.5	5.0	1.2	32.1	4.55
UA70032	32	37.5	5.0	1.2	34.1	4.55
UA70035	35	40.5	5.0	1.2	37.1	4.55
UA70040	40	46.0	5.5	1.4	42.2	4.9
UA70045	45	51.0	5.5	1.4	47.2	4.9
UA70050	50	56.0	5.5	1.4	52.2	4.9
UA70063	63	69.5	6.0	1.4	65.4	5.4